



EOS Herkules XL S120

Sauna heater for commercial saunas. Floor-standing model.

Luxury class floor-standing sauna heater for the Finnisch (dry) sauna. The unique double rock store ensures excellent heat storage capacity and allows frequent water splashes. The rock store is placed above the heating elements for easy servicing and improved air convection

Your advantages:

- Exclusive, rich in contrast design with brushed stainless steel front and anthracite pearl effect coated side panels.
- Durable construction. Completely made of stainless steel.
- Double rock store for excellent heat storage and powerful water infusions. With essence & herbs holder.
- Slim design, only 53 cm depth.
- Service-friendly - rock store above heating elements.
- Made in Germany quality from EOS.

Specifications:



Outer shell:	Anthracite pearl effect powder coated sides, brushed stainless steel front.
Top:	Stainless steel
Rear wall:	Stainless steel, blank polished
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed in rear wall
Power range:	18.0, 24.0 and 30.0 kW
Power supply:	400 V 3N AC 50 Hz
Dimensions (H x W x D):	85 x 96 x 53 cm
Stone filling:	2 x 60 kg, incl. in delivery
Installation:	Floor-standing



CE EAC IPx4 MADE IN GERMANY

Connection diagram

18,0 - 30,0 kW

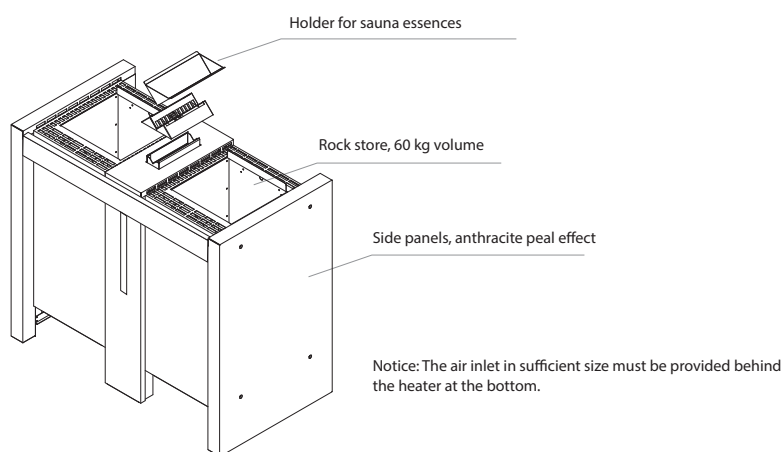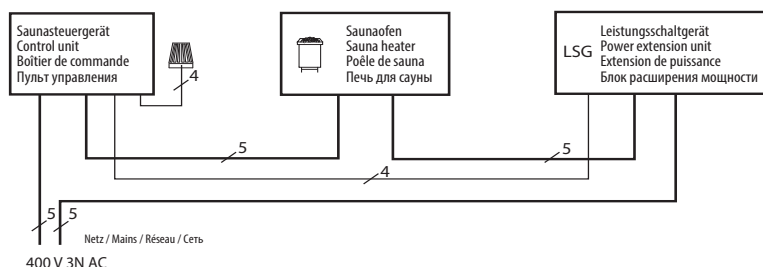


Technical specifications

Power output	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
18,0 kW	5 x 2,5 mm ²	5 x 1,5 mm ²	5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
24,0 kW			5 x 6 mm ²	5 x 4 mm ²	
30,0 kW	3 x 1,5 mm ²	--	5 x 16 mm ²	(2x) 5 x 4 mm ²	

All cross sections of a line are minimum diameters in mm² (copper wire).

Item no.	Power output	Electrical connection	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94.4276	18,0 kW	400 V 3N AC 50 Hz	3 x 16 A	3 x 16 A	85 / 96 / 53	24 - 35 m ³	50 x 6 cm	85 kg	approx. 2x 60 kg	EmoTec LSG 09R
94.4277	24,0 kW			3 x 35 A		35 - 45 m ³	50 x 8 cm			LSG 18
94.4278	30,0 kW		1 x 16 A	3 x 63 A		45 - 65 m ³	50 x 10 cm			LSG 36

Minimum clearances

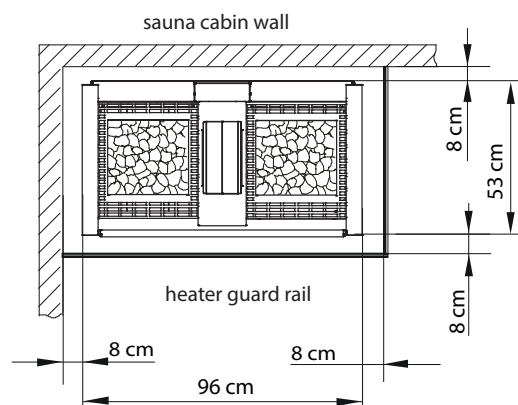

Suitable control units

Model	Item no.
EOS Econ D2	94.6138
EOS Econ D3	94.6140
EOS Econ D4	94.5842
EOS EmoTec D series	
EOS EmoStyle D / Hi series	
EOS EmoTouch 3 series	

Spare heating elements

Description	Item no.
for 18,0 kW (18 x 1000 W)	2001.1599
for 24,0 kW (18 x 1333 W)	2001.1598
for 30,0 kW (18 x 1666 W)	2001.3763