



Technical data sheet

EOS Econ D1

**Sauna control unit for dry Finnish sauna.
For domestic sauna cabins.**

Electronic sauna control unit with LCD display with multi-language menu navigation. For dry Finnish sauna heaters.

Your advantages:

- Illuminated alpha-numeric multiline LCD display.
- Easy to use thanks to 12 language menu navigation.
- Fast, simple installation and setup.
- Modern, slim housing design, only 58 mm thick.
- Made in Germany quality from EOS.


Specifications and features:

Housing:	plastic, creme-white
Display:	LCD display 40 x 22 mm, multiline, alpha-numeric, with backlighting
Menu navigation:	12 languages (DE, EN, FR, ES, IT, NL, RU, PL, FI, SE, SLO, CZ)
Temperature control:	digital two-point
Heating time:	up to 6 hours
Temperature limitation:	139 °C safety overheating limitation
Switching capacity:	up to 9 kW
Power supply:	400 V 3N AC 50 Hz
Installation:	wall-mounting or semi-recessed
Functions:	Temperature preselection, Output for cabin lighting (max. 100 W), Child lock (keypad lock), Error messages in clear text, Life-Guard, Data retention by power loss (24 h), „Switch-Off“ switch.




CE EAC IPx4 MADE IN GERMANY 


Connection overview

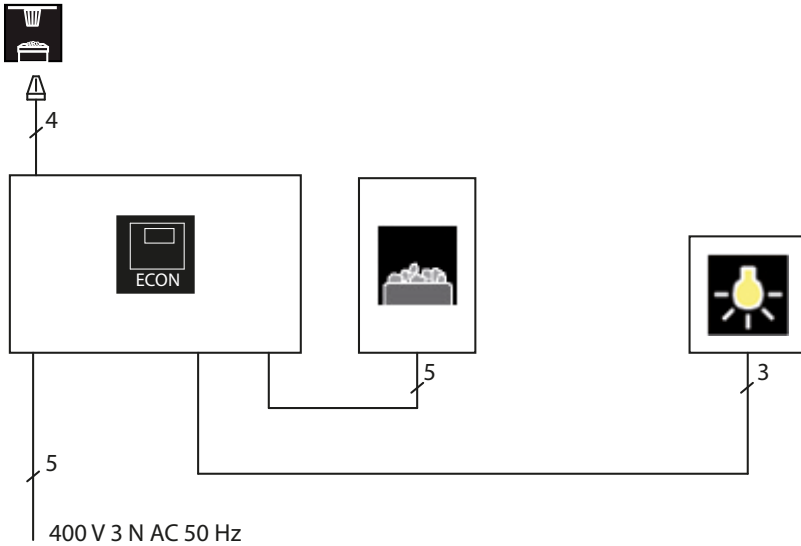

Connection diagram

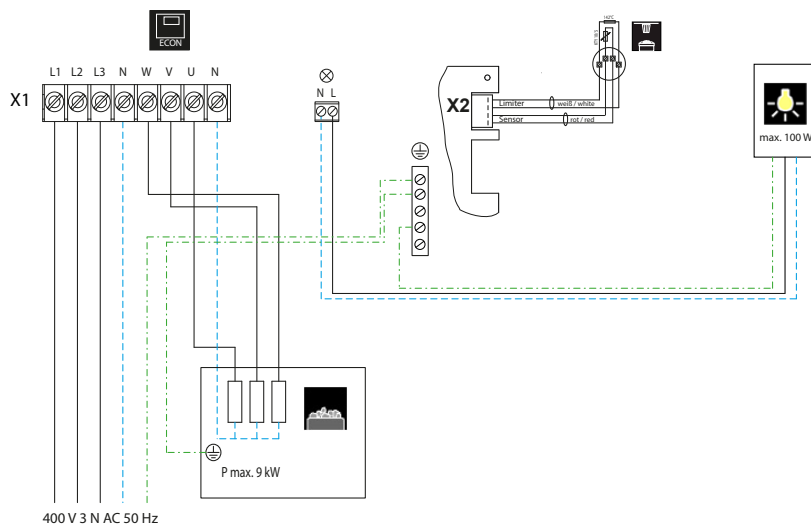


Installation

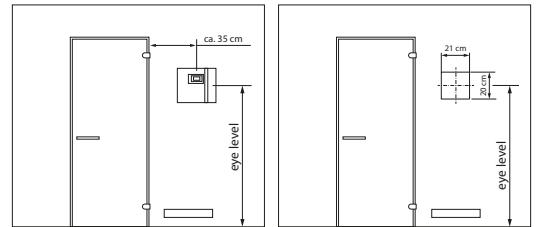


Wall cut-out (aperture) by semi-recessed mounting

Sensor installation



by sauna cabins:

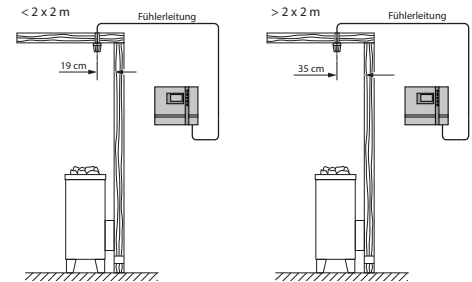

Spare parts and accessories

Description	Item no.
Temperature sensor, 2 m cable	607570
Main board (2-part)	2001.5620
Button strip	2001.4892
Housing (upper side)	2001.4891
Housing (bottom side)	2001.4890
Display cover 1 (front)	2001.4913
Cover 2 (buttons)	2001.4915
Switch-Off rocker switch	2001.3652

Specifications

Item no.	Electrical connection	Switching capacity	Power extension via LSG unit	Temperature control range	Heating time limitation	Dimensions H/W/D in cm	Ambient temperature in operation	Weight without packing
94.6136	400 V 3N AC 50Hz	9,0 kW resistive load	no	30 - 115 °C	6 h	22 / 25 / 5,8	-10 to +40 °C	1,0 kg