



EOS IRS 30 Ceramic

Infrared radiator for IR warming- and sauna cabins. IR-C range.

IR radiator for wall-mounting installation. Completely assembled with 3 m silicone coated cable, with Wieland type plug.

Your advantages:

- · Fast heat-up time
- Advantageous reaction on heat emission of ceramic material
- With 300 W ceramic emitter
- Long-wave IR-C range
- With reflector shield of polished aluminium, protective flocked safety grill and silicone coated cable
- Made in Germany quality from EOS

Technical Data:


Casing: electrolytic galvanised steel plate Reflector: burnished aluminium reflector Covering grille: with protective flock spray Assembly: horizontal or vertical,

no ceiling suspension

560 x 185 x 65 mm Dimensions (HxWxD):

Power input: 300 W Power supply: 230 V 50 Hz Weight: approx. 2 kg















Connection diagram



Installation

Vertical installation on cabin wall

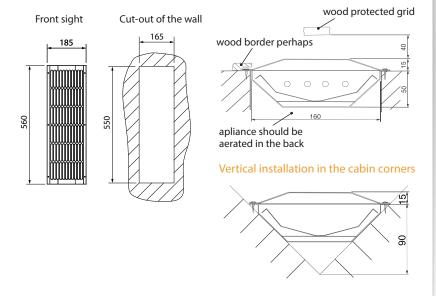

Attention! Make sure to provide sufficient air circulation around the radiator. The space above the radiator must not be blocked, so that the warm air may rise freely. Risk of fire!

Item no.	electrical connenction/ Power	Emitter	Surface temperature	Spectrum	Dimensions, HxWxD, in mm	Cut-out for mounting, in mm	Weight without packing	For operation with control units
94.1878	230 V N AC 50 Hz / 300 W	Ceramic	400 - 600 °C	3-10 μm IR-C	560 x 185 x 65	550 x 165	approx. 2 kg	InfraTec Classic InfraTec Premium EmoTec IR InfraStyle

Druck-Nr.: 29342545 / 44.20 Technical changes reserved