



## EOS IRS 40 RHK

**Infrared radiator for IR warming- and sauna cabins. IR-B and IR-C range.**



IR radiator for wall-mounting installation. Completely assembled with 3 m silicone coated cable, with Wieland type plug.

### Your advantages:

- Fast heat-up time
- With 400 W emitter (metal tube with magnesia oxide type)
- Medium-wave IR-B and long-wave IR-C range
- With reflector shield of polished aluminium, protective flocked safety grill and silicone coated cable
- Made in Germany quality from EOS

### Technical Data:


Casing:	electrolytic galvanised steel plate
Reflector:	polished aluminium
Covering grille:	with protective flock spray
Assembly:	horizontal or vertical, no ceiling suspension
Dimensions (HxWxD):	550 x 184 x 65 mm
Power input:	400 W
Power supply:	230 V N AC 50 Hz
Weight:	approx. 2 kg

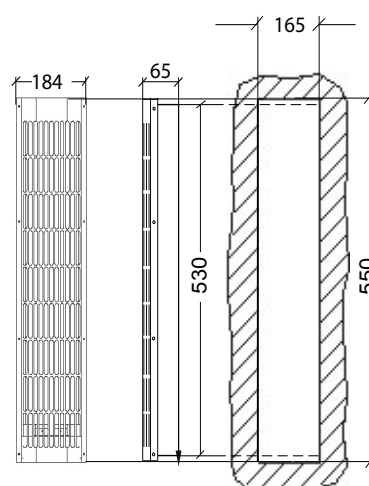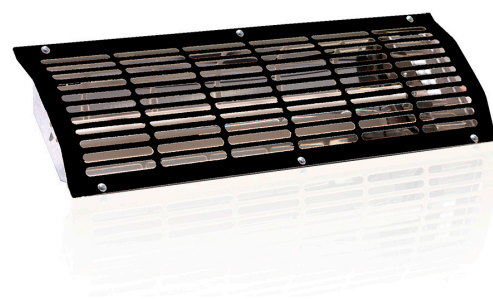

MADE IN GERMANY




## Connection diagram

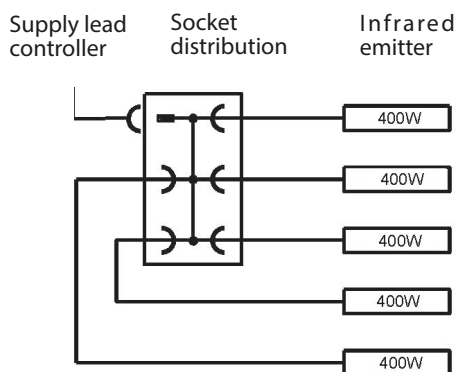


## Installation

Front sight


Cut-out of the wall

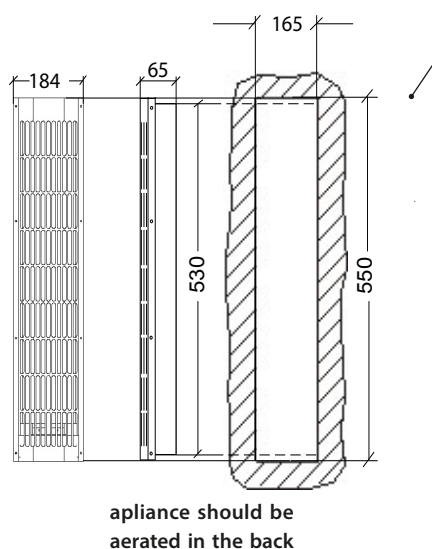

### Vertical installation on cabin wall

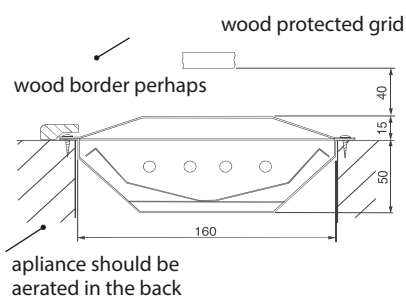

### Vertical installation in the cabin corners

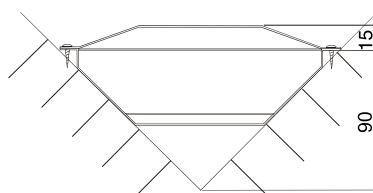

**Attention!** Make sure to provide sufficient air circulation around the radiator. The space above the radiator must not be blocked, so that the warm air may rise freely. **Risk of fire!**

Item no.	electrical connenction/ Power	Emitter	Surface temperature	Spectrum	Dimensions, HxWxD, in mm	Cut-out for mounting, in mm	Weight without packing	For operation with control units
94.4012	230 V N AC 50 Hz 400 W	Magnesium	400 - 600 °C	2-10 µm IR-B IR-C	550 x 184 x 65	550 x 165	approx. 2 kg	InfraTec Classic InfraTec Premium EmoTec IR InfraStyle

