



EOS Cubo Avantgarde black

Sauna heater for domestic and commercial saunas. Floor-standing model.

Floor-standing sauna heater for dry sauna as an exclusive Avantgarde edition. Striking, distinctive design thanks to the stylish rock store extension frame with white quartz stones. The luxurious Matt Black finish on all sides perfectly completes the design - great for installation in the centre or in front of glass panels.

Your advantages:

- Exclusive, distinctive design with specially styled rock store extension frame.
- Luxurious "Matt Black" finish on all sides including the top.
- Set of special white quartz stones included in delivery.
- Uniform appearance on all sides - perfect for installation in front of glass panel or in the centre of the sauna.
- Compact size - only 38,5 cm depth.
- Made in Germany quality from EOS.

Specifications:

Outer shell:	Matt black powder coated steel, scratch resistant, on all sides including the top
Top with extension:	Stainless steel, matt black finish
Rock store:	Stainless steel, above heating elements
Terminal box:	Recessed in rear wall panel, cable connection on the bottom side
Power range:	9,0 ; 10,5 and 12,0 kW
Power supply:	400 V 3N AC 50 Hz
Dimensions (HxWxD):	72 x 40 x 38,5 cm
Stone filling:	25 kg regular stones + 15 kg quartz stones, only quartz stones incl. in delivery
Installation:	Floor-standing




With special rock store extension frame and 15 kg white quartz stones

Note: Quartz stones are stacked on top of the regular 25 kg sauna stones


CE EAC IPx4 MADE IN GERMANY

Connection diagram

9,0 kW

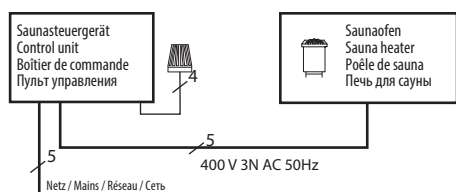

10,5 + 12,0 kW

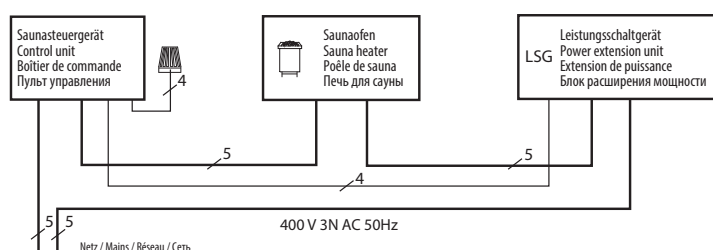

Spare heating elements

Description	Item no.
For 9,0 kW (6 x 1500 W)	2000.8085
For 10,5 kW (3 x 1500W, 3 x 2000W)	2000.8085/8086
For 12,0 kW (6 x 2000 W)	2000.8086


Technical specifications

Power output	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
9,0 kW	400 V 3N AC 50 Hz	5 x 2,5 mm²	5 x 1,5 mm²	--	--	--
10,5 kW				5 x 2,5 mm²	5 x 1,5 mm²	4 x 1,5 mm²
12,0 kW						

All cross sections of a line are minimum diameters in mm² (copper wire).

Item no.	Power output	Electrical connection	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94.7109	9,0 kW	400 V 3N AC 50 Hz	3 x 16 A	--	72 / 40 / 38,5	9 - 14 m³	35 x 6 cm	28 kg	25 kg regular sauna stones + 15 kg quartz sauna stones	no
94.7370	10,5 kW			3 x 16 A		11 - 15 m³				EmoTec L09R
94.7110	12,0 kW					14 -18 m³	35 x 7 cm			

Minimum clearances

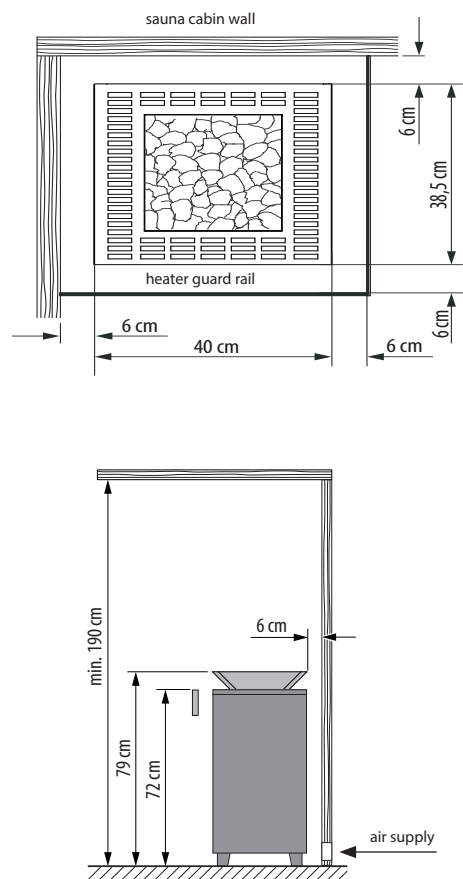

Suitable control units

Modell
EOS Econ series (Econ D1 up to 9 kW)
EOS EmoTec D series
EOS EmoStyle D / Hi series
EOS EmoTouch series